

14年全球
World No.1*

JACK

Thickness-adjustable direct-drive overlock sewing machine

Fix Less , Save More



Product Features



Light and heavy adjustable freely

material, M type-medium material to H type-heavy material freely; suitable for mesh, knitting, denim, etc different kinds of order demands.




Seam thickness upgrade

Large stitch width and thickness with long stroke, providing more powerful and stable power output, no skipped stitches or broken threads during thick material sewing.



Anti-counterfeiting

Enhance external features to prevent counterfeit machines and uphold the brand's professional image.

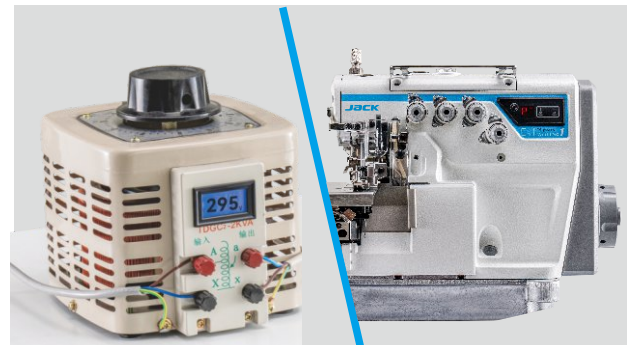

Wide operating voltage

Strong adaptability, ultra-stable, failure rate reduced to 0.05%, adaptable to an ultra-wide voltage range of 90-295V.

Specification

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Liftin Height (mm)	g	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E5-3-02/233	Ordinary Three-Thread	#11	1	3	/	4	0.72-2	5.5		5500	515*360*510	27/34
E5-4-M03/333	Ordinary Four-Thread	#11	2	4	2	2X4	0.72-2	6		5500	515*360*510	27/34
E5-5-03/233	Five-Thread 5x5	#14	2	5	5	5X5	0.72-2	5.5		5500	515*360*510	27/36
E5-5-03/333	Five-Thread 3x4	#14	2	5	3	3X4	0.72-2	5.5		5500	515*360*510	27/35
E5-5-M04/435	Five-thread thick material	#19	2	5	5	5X6	0.8-1.5	7		5500	515*360*510	27/35
E5-6-03/333	Ordinary six-Thread	#11	3	6	3X2	3X2X4	0.72-2	5.5		5500	515*360*510	27/35
E5-6-M04/435	Six-thread thick material	#19	3	6	5X2.5	5X2.5X3.5	0.8-1.5	7		5500	515*360*510	27/35
E5-2	Two-Thread Fabric Joining Seam	#11	1	2	/	6	0.72-2	3.5		5500	515*360*510	27/34
E5-3-82/233	Three-Thread Back Stitch Seam	#11	1	3	/	4	0.72-2	5.5		5500	515*360*510	27/34
E5-3-32R2/223	Dense Overlock Machine	#9	1	3	/	1.5	0.72-2	5.5		5500	515*360*510	27/34
E5-4-83/323	Four Thread back stitch	#11	2	4	2	2X4	0.72-2	5.5		5500	515*360*510	27/35
E5MJ-4-53/233	Towel Machine	#11	2	4	2	2X4	0.72-2	5.5		5500	515*360*510	27/36