

技术参数

机 型	机针	针数	线数	针间距 (mm)	针迹宽度 (mm)	针迹长度 (mm)	差动比	压脚高度 (mm)	最高转速 (S.p.m)	体积 (mm)	重量 (kg)
C4-02×250 (包兜机)	14#	2	4	5	5	3.8	0.7-2	3	7000	525*360*510	27.9/35.8
C4-3-02/233 (3线基本型)	11#	1	3	-	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4WF-3-02/213 (无纺布)	11#	1	3	-	4	8.5	0.7-2	5	7000	525*360*510	27.9/35.8
C4-3-12/233 (下摆缝)	11#	1	3	-	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-3-32R2/223 (密拷缝)	9#	1	3	-	1.5	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-3-82/233/P (3线倒回缝)	11#	1	3	-	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-4-M03/333 (4线基本型)	11#	1	4	2	4	4.6	0.7-2	5.5	7000	525*360*510	27.9/35.8
C4MJ-4-53/233 (毛巾机)	11#	2	4	2	4	4.2	0.7-2	5	7000	525*360*510	27.9/35.8
C4-4-83/323/P (4线倒回缝)	11#	2	4	2	4	4.2	0.7-2	5.5	7000	525*360*510	27.9/35.8
C4-4-M03/333/H/M (厚料)	11#	2	4	2	4	4.6	0.7-2	6	7000	525*360*510	27.9/35.8
C4-5-53/233 (3×5) (包布条)	14#	2	5	3	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-5-03/233 (5×5)	14#	2	5	5	5	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-5-03/333 (3×4)	14#	2	5	3	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-5-A04/435 (极厚料)	19#	2	5	5	6	5	0.8-1.5	7	7000	525*360*510	27.9/35.8
C4-6-03/333 (6线)	11#	3	6	3x2	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8



**Full automatic overlock machine
with voice guide**



Jack Wechat



Jack Sewing
Machine Co.,Ltd.



C4

JACK SEWING MACHINE CO.,LTD.

No. 15 Airport South Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com


C4

Full automatic overlock machine with voice guide


Automatic voice broadcast solution

please check whether the connecting line of operation panel and control box is loose, please try to reset to factory setting or restart machine.

Presser foot open, automatic voice alarm

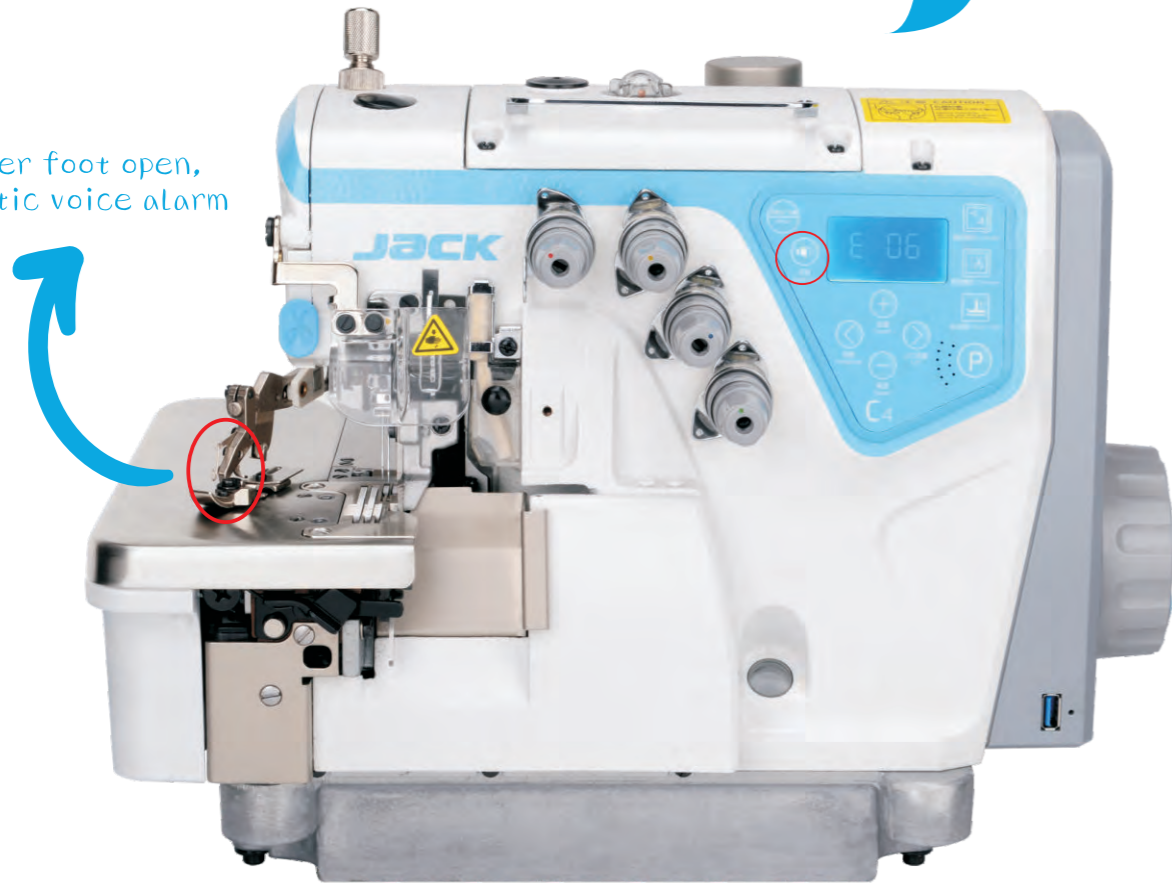

Voice guide, automatic voice alarm and broadcast solution, easy to operate

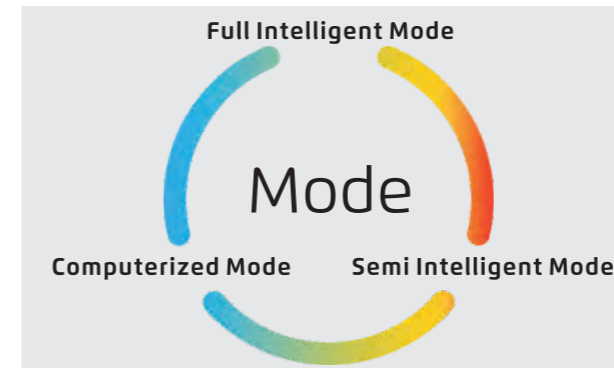

1 Three Operation Model, Easy To Change

Full Intelligent Mode: Machine Works Automatically Without Foot

Computerized Mode: machine Works With Automatic Sensor, Automatic Presser Foot Lifter, Automatic Trimming

Computerized Mode: Machine Works According To Workers Operation



3 Oil control effectively, high yield

All inclusive needle bar and oil supply system , avoid to oil leakage.




4 One-key reset

Can choose back to user setting or factory setting




2 The highest speed can reach 7000 S.p.m

The efficiency of C4 is 35%-100% faster than normal machine.

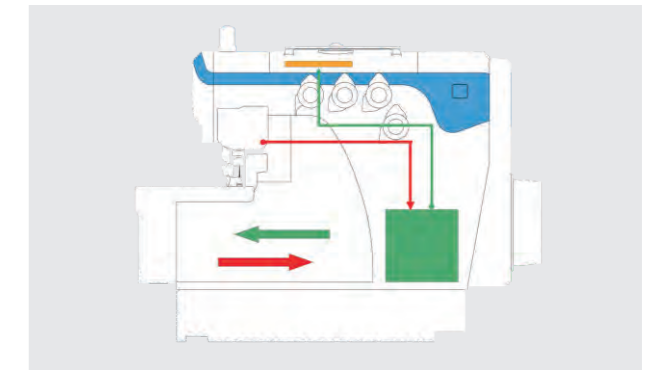

3 Oil control effectively, high yield

All inclusive needle bar and oil supply system , avoid to oil leakage.

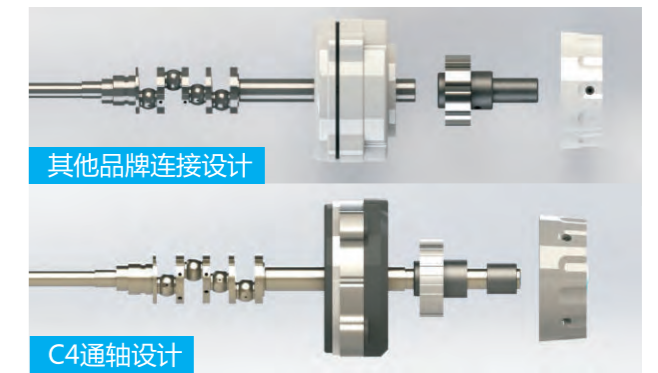

4 One-key reset

Can choose back to user setting or factory setting

5 Thru-shaft design, stable and durable

Reduce machine torque, machine works more stable